WTJ-60-750 and WTJ-60-1000

TAIJI-USA

PLAN VIEW TOP

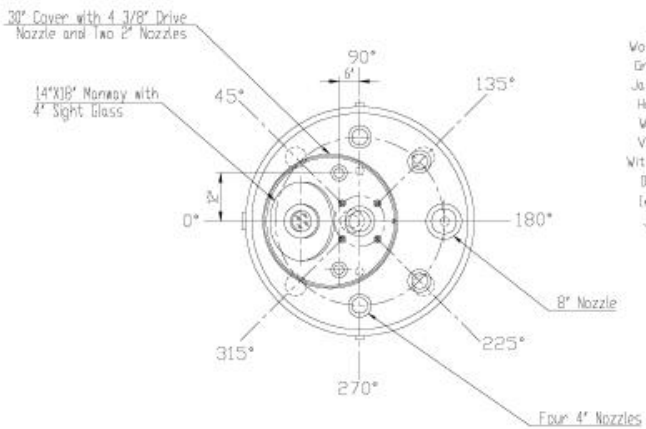

SPECIFICATIONS

MODEL	WTJ-60-750	WTJ-80-1000
Working Capacity,Gals	750	1000
Gross Capacity,Gals	880	1125
Jacket Capacity,Gals	141	171
Heating Area,Sq.Ft.	96	122
Weight,Lbs.		
Vessel Only	5950	7150
With Drive & Agitation	7700	9300
Design Rating		
Internal	100 PSIG/FV @ -20°F/450°F	
Jacket	90/90 PSIG @ -20°F/450°F	

ELEVATION

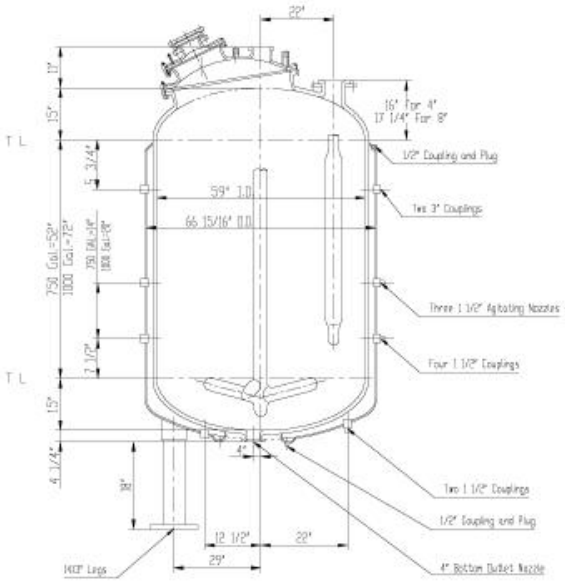

- Constructed to ASME Code Section VIII, Division 1
- Fusion 900 Glass Lining
- Mechanical Seal: Single or Double with optional dry running capabilities
- Agitator: Standard Retreat Curve Impeller
- Baffle with optional Temperature Sensor
- Standard 150lb ANSI Nozzles with Split Flanges
- Jacket Connections 3000lb Couplings
- Footings: Standard Removable screw-in legs with optional side supports
- TEFLON Envelope Gaskets, CRT
- Custom Designs upon request
- Interchangable with RA-60 and SA-60 Reactors