



WTJ-96-3000 and WTJ-96-4000

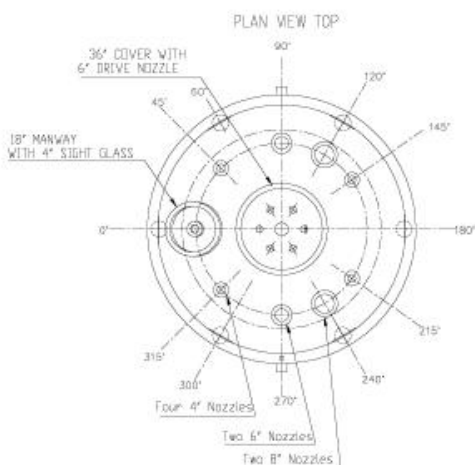

SPECIFICATION

MODEL	WTJ-96-3000	WTJ-96-4000
Working Capacity,Gals.	3000	4000
Gross Capacity,Gals.	3414	4417
Jacket Capacity,Gals.	366	453
Heating Area,Sq.Ft.	236	300
Weight,Lbs		
Vessel Only	20600	25150
With Drive & Agitation	24200	30200
Design Rating		
Internal Jacket	100 PSIG/EV @ -20F/450F	90/90 PSIG @ -20F/450F

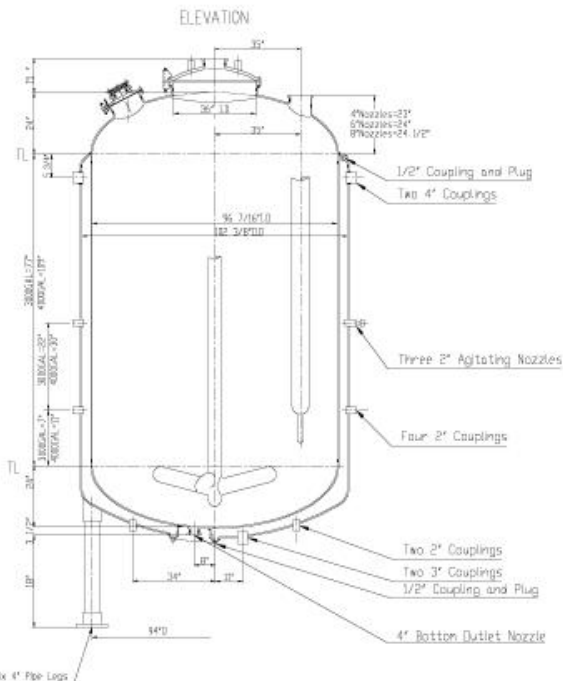

- Constructed to ASME Code Section VIII, Division 1
- Fusion 900 Glass Lining
- Mechanical Seal: Single or Double with optional dry running capabilities
- Agitator: Standard Retreat Curve Impeller
- Baffle with optional Temperature Sensor
- Standard 150lb ANSI Nozzles with Split Flanges
- Jacket Connections 3000lb Couplings
- Footings: Standard Removable screw-in legs with optional side supports
- TEFLON Envelope Gaskets, CRT
- Custom Designs upon request
- Interchangeable with RA-96 and SA-96 Reactors